Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 222818 (207464-2)

DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST
BD	48

P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
				REVISIONS		
			B2	REV. & REDRAWN ECN-1119	7-18-85	SW
			C	REV PER ECN BD6802	12/03/92	RM
			C1	ADDED -6 PER NPR 4855	07/07/93	SB
			D	OBS -4 PER EC 0020-724-95	08 MAR 96	JCS
			E	OBS -3 PER EC 0020-524-96	23 AUG 96	LF
			F	OBS -6 PER EC 0420-141-96	17 SEPT 96	SB

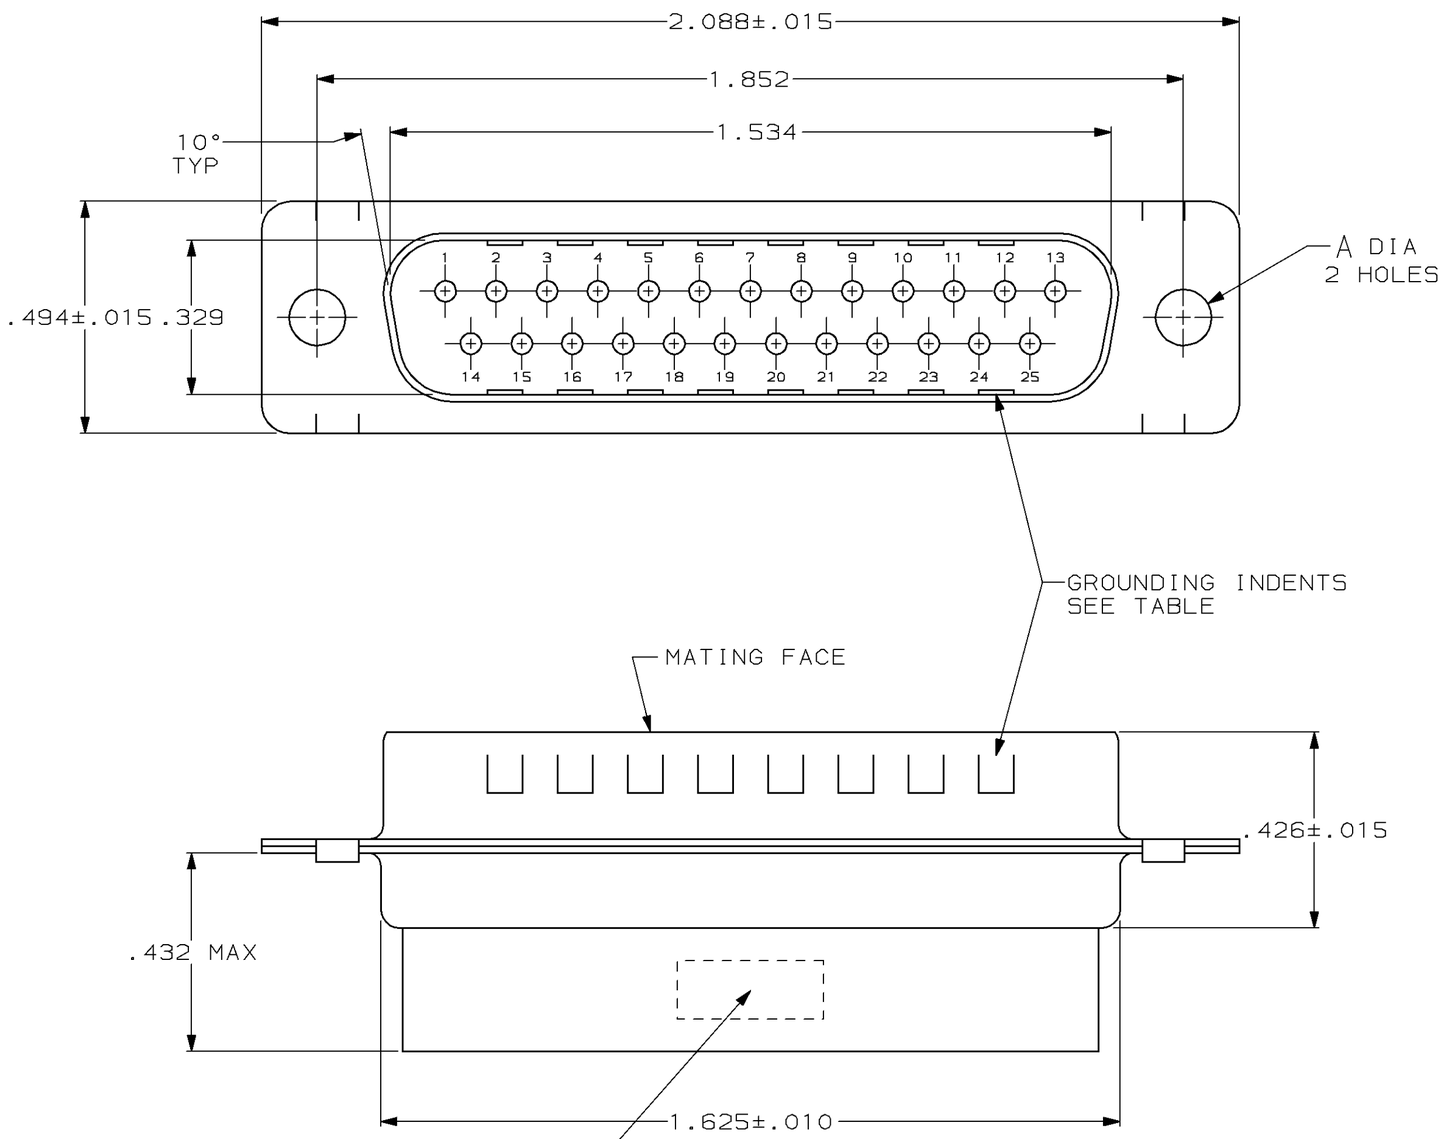

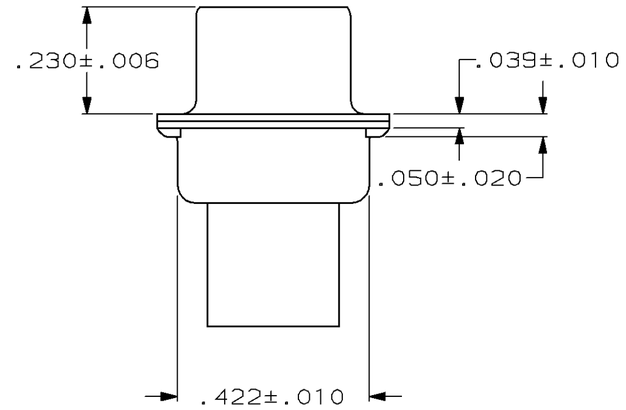

1. CONNECTOR ACCEPTS SIZE 20 DF PIN CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
2. CONNECTOR COMPLIES WITH 108-40005 WHERE APPLICABLE.
3. NYLON, FLAME RETARDANT, 94V-0 RATED, GLASS FILLED, BLACK.
4. STEEL PER ASTM A109.
5. TIN OR TIN-LEAD PLATED PER MIL-T-10727.
6. TIN PLATED PER MIL-T-10727 OVER COPPER PER MIL-C-14550.

PART NO	A	GROUNDING INDENTS	SHELL FINISH	PACKAGING TYPE
207464-6	.120	YES	6	SMALL PACK
207464-4	.154	YES	5	STANDARD
207464-3	.154	NO	5	STANDARD
207464-2	.120	YES	6	STANDARD
207464-1	.120	NO	5	STANDARD
				OBSOLETE
				OBSOLETE
				OBSOLETE

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN INCHES
TOLERANCES ON :
2 PLC DEC ± -
3 PLC DEC ± .005
ANGLES ± 2°

MATERIAL
MOLDED PARTS: 3
SHELLS: 4

FINISH
SHELLS: SEE TABLE

DR 7-19-85 S.WELDON
CHK 7-29-85 J.GERACE
APPD 7-29-85 L.BREKOSKY
APPD 7-31-85 V.KUMAR
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

AMP Incorporated
Harrisburg, PA 17105-3608

NAME
PLUG CONNECTOR, SIZE 3, 25 POSITION, AMPLIMITE™ HDP

SIZE	CAGE CODE	DRAWING NO
C	00779	C-207464

SCALE NTS SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

CUSTOMER DRAWING

207464